




ATEX HANDHELD FLUORESCENT LEADLAMP



- ATEX Approved for Zone 1 & 2 explosive Gas and Dust atmospheres
- Cold Cathode light technology for extra long lamp life
- Even white fluorescent light ideal for inspection
- Compact and Lightweight design
- Anti roll & Hook
- Fitted with Cable and ATX plug
- Wide Mains Voltage Range 110v – 254 V AC



LL-440
8W CCFL (Approx 180°C)
Peak Luminous Intensity at 1m **205 Lux**

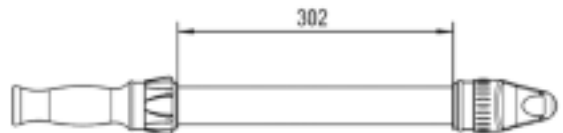

The ATEX compliant LL-440 Fluorescent Handheld Leadlamp is a versatile, lightweight, cable powered handlamp, with a high power fluorescent light output, ideal for handheld inspection and work activities in zone 1 and 2 explosive atmospheres.

The LL-440 Handheld Leadlamp is CE marked compliant with the 94/9/EC 'Explosive Atmospheres' (ATEX) Directive and is certified to the IECEx Scheme. PTB Certification is to the latest standards, for use in zone 1 and 2 potentially explosive gas, vapour and mist atmospheres, where a T4 temperature class permits. Dust ignition protection covers use in zones 21 and 22, with a certified maximum surface temperature of 120°C

Modern CCFL cold cathode fluorescent lighting technology is used in the LL-440, with the advantages of an extra long life of up to 20,000 hours, and a high efficiency output of 800 lumens. The replaceable four lamp assembly emits a very high quality, even white light; minimising shadows and enhancing visibility in inspection and work tasks. The supply voltage range for the Handheld Fluorescent Leadlamp is from 110 to 254 volts AC; low voltage units are also available.

The LL-440 has a compact and lightweight design, ideal for handheld use. The transparent light emitting leadlamp enclosure is constructed from robust and highly durable polycarbonate polymer, well able to withstand

the effects of heavy industrial use. Further protection from scratches and impact is possible by using a stainless steel spiral lens guard accessory.

Sealed to IP67, the lamp is protected from the ingress of dusts and liquids, enabling use in the harshest of environments. The Leadlamp incorporates an integral oil resisting rubber grip handle with hook for suspension in the work area.

The LL-440 is supplied with 10 metres of HOFR cable and a 110V ATX plug fitted as standard. Alternative cable types and plugs are available on request. A range of ATEX compliant transformers of rugged design and construction, are available, for use in or near hazardous locations.

ATEX Handheld Fluorescent Leadlamp Technical Specification

Product reference		LL-440
Product description		ATEX Handheld Fluorescent Leadlamp
Code		Ⓔ II 2 G Ex d IIC T4 Ex tD A21 IP67 T120°C
Manufacturer		Stahl
Apparatus standards		EN60079-0, EN60079-1, EN61241-0, EN61241-1 IEC60079-0, IEC60079-1, IEC61241-0, IEC61241-1
Type of protection		"d" flameproof, "tD" enclosure
Area of classification (Gas)		Zones 1 and 2, Gas Groups IIA IIB IIC
Temp. classification (Gas)		T4
Area of classification (Dust)		Zones 21 and 22
Max. Surface Temp. (Dust)		120°C
Ambient temperature		-20°C to +40°C
Certificate		PTB07ATEX1009 IECEX PTB 07.0018
Enclosure	Pipe	Polycarbonate
	Handle/Hook	Elastomer (EPDM)
Beam type		Wide Angle, white inspection light
Light source:	Pt. no.	LL-445
	Type	Lamp holder with 4 x CCFL (Cold Cathode Fluorescent Lamps)
	Power	8W
	Output	800 lm
	Life	Up to 20,000 hrs
Power source:	Insulation	Class II
	Voltage	110-254V AC ±10%
Cable		10m, 1.5mm ² HOFR with ATX Plug
Weight		1.2kg (excluding cable)
Ingress protection		IP66/67 to EN60529:1992

All products supplied with ATX plugs as standard.

All products supplied with fluorescent lamps.

Changes to the above specifications available on request. All information has been gathered under laboratory conditions, the user must regard the values given as approximate

WOLF SAFETY LAMP COMPANY

Saxon Road Works, Sheffield S8 0YA, England

Tel: +44 114 255 1051 Fax: +44 114 255 7988

E-mail: info@wolf-safety.co.uk Website: www.wolf-safety.co.uk

????? Issue 01

MMD/??/4.09/??K



Wolf Safety Lamp Company