





FLX INSPECTION FLOODLAMP



- **Diffused Flood Output**
- **Flameproof Protected Switch**
- **Fully Portable for Remote Areas**
- **6 Hour Light duration**
- **Fabricated Stainless Steel Construction**
- **High rate charger operable on site voltage**
- **Enhanced peak light output**



FLX Inspection/Floodlamp
18w flood beam (approx 40°)
Peak luminous intensity at 16ft/5m 50lux

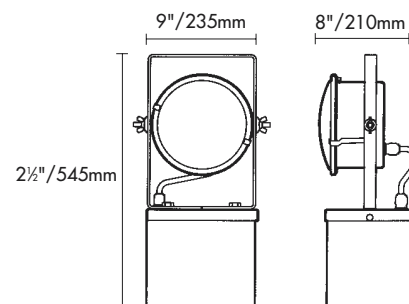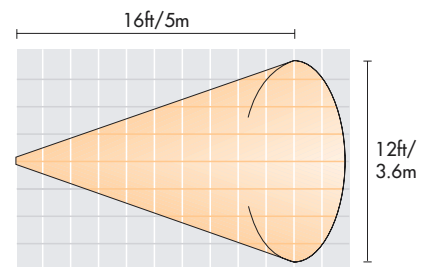

A free-standing, BASEEFA approved Inspection Floodlamp for use in zones 1 and 2 hazardous areas, the FLX is commonly used for illumination in confined spaces for the performance of comparatively long duration work tasks. It is ideally suited for use in areas where no power source of any type is available but where a good level of illumination is essential.

The 6 volt, 18 watt bulb is protected by both an inner and outer lens, a crazed effect gives diffused illumination creating a wide angle spread of light with a powerful 8° beam centre. Power is provided by two rechargeable Sealed Lead Acid Batteries housed in a powder paint coated stainless steel box with the passivated steel lamp head mounted above. A carrying handle across the top gives ease of portability.

Charging is via a 90-277V input mains charger. When fully charged the FLX Inspection Floodlamp will give continuous output for up to 6 hours and recharges in 8 hours.

One of the key benefits of this product is that it is fully portable and does not have the restrictions of being connected to a power supply, but gives the level of illumination normally associated with larger, more permanent light fittings.

Recharging of the battery must be carried out in the non-hazardous area. The recharging socket is

situated in the battery compartment of the lid which must therefore be open at such times, ensuring good ventilation during charging. Spare parts are available and maintenance can be carried out by any competent technician.

Applications of use are in tank cleaning, the repair of sewers and underground services, in gas transmission plants, on offshore platforms, in pump rooms of tankers and for emergency services.

Each lamp is supplied with operation and maintenance instructions. Technical support is readily available from the company.

FLX Inspection/Floodlamp Technical Specification		
Product reference	FL-F86A	
Product description	Rechargeable portable safety floodlamp	
Code	Ex e d IIC T3	
Apparatus standard	BS 4683, EN50 018	
Type of protection	"e" increased safety, "d" flameproof	
Area of classification	Zones 1 and 2, gas groups IIA, IIB and IIC	
Temp. classification	T3	
Ambient temperature	-20°C to +40°C	
Certification	BASEEFA Certificate No. Ex 80345	
Enclosure	Fabricated stainless steel, powder coated	
Lens	Inner polycarbonate, outer polycarbonate	
Beam type	Flood	
Light source:	Pt no.	FL-02
	Type	Vacuum filament bulb
	Volts	6v
	Watts	18w
	Output	198lm
	Life	400hrs
Power source:	Pt. no.	FL-32
	Type	2 x rechargeable batteries, sealed lead acid
	Volts	6v
	Capacity	2 x 10Ah
	Life	up to 500 recharge cycles
Light duration	up to 6 hours	
Ingress protection	IP 54	
Weight	22½lb/10.2kg	

SAFETY LAMP OF HOUSTON, INC.
1816 Rotary Drive, Humble, Texas 77338. U.S.A.
Telephone: +1 281 964 1019 Facsimile: +1 281 964 1040
Email: safetylampofhouston@prodigy.net Website: www.safetylampofhouston.com

