




WOLF TURBOLITE LAMPS

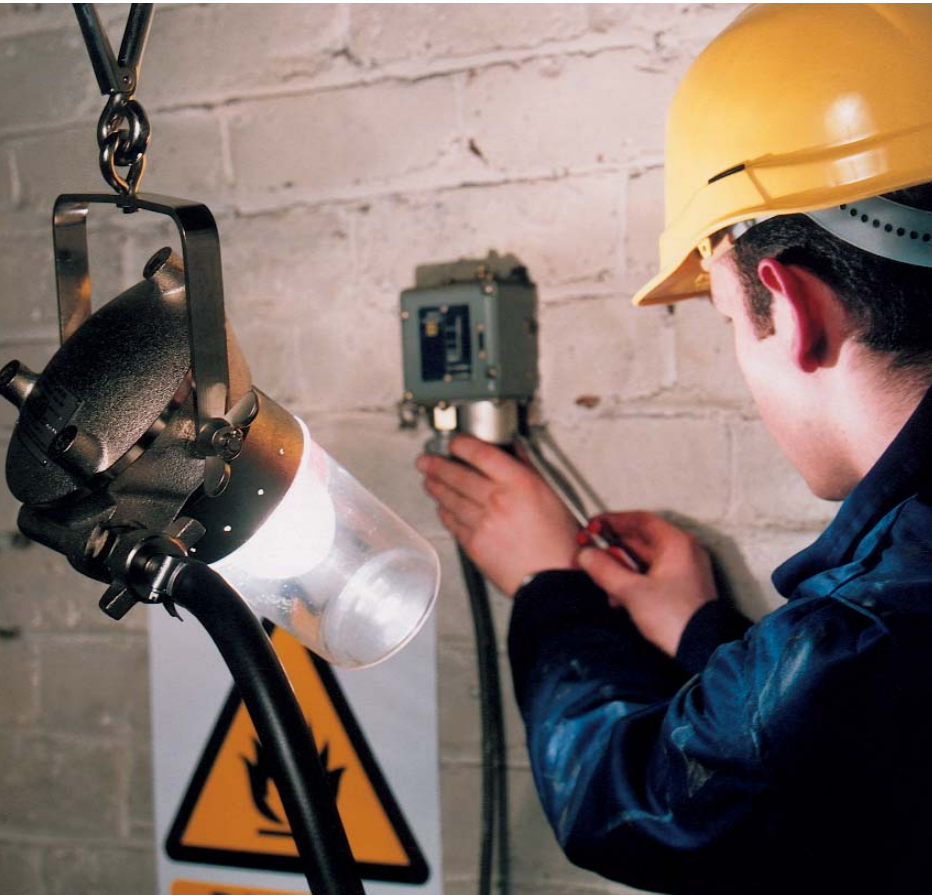

- 250 Watt Halogen Ultimate Output
- Electronic Setting Device
- Generator Overspeed Protector
- Advanced Internal Topology Rotor Design
- Spark Free Housings
- International Market Leaders
- Full Accessory Range Available
- MSHA approval
- Now available in lightweight aluminium
- Does not trail an electric cord

Wolf Turbolite A-TL44

250w with ball glass for all round illumination
Peak luminous intensity at 8ft radius **70lux**

Wolf Turbolite A-TL45

250w with polished reflector spot beam (approx 10°)
Peak luminous intensity at 16½ft **2000lux**


Wolf Turbolite A-TL45

250w with matt reflector flood beam (approx 25°)
Peak luminous intensity at 16½ft **950lux**



A-TL44

A-TL45

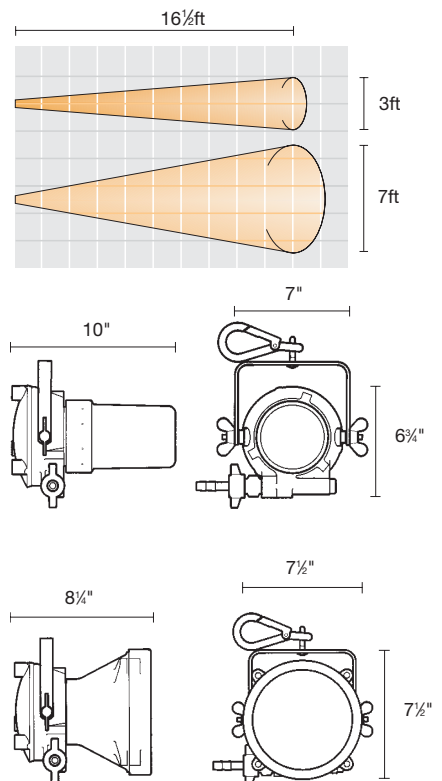

The Turbolite range of compressed air driven lighting was developed as the high power version of the well known Wolf Airturbo. The Turbolite is certified for use in zones 1 and 2 hazardous areas.

Common applications are in the Oil and Petrochemicals Industries, for tank cleaning and pipeline inspections, offering a safer alternative to low voltage lighting in dangerously wet conditions as well as where flammable gases and vapours can accumulate in confined spaces.

Turbolite Type 44 – has a 360° ball glass and protective polycarbonate dome to provide all-round, general purpose illumination. A snap hook provides for suspension of the lamp in the working area, or for simple fastening to a folding tripod.

Turbolite Type 45 – has a reflector head for direct floodlit illumination. Polished or matt reflectors give the option of a concentrated narrow beam or diffused wide angle illumination.

The housings of the Turbolites are a spark free material, as is the safety snap hook, but forged for extra strength. All external parts are nickel plated. Internal components are of durable design making the products suitable for use in the harshest industrial environments.

A clean dry air supply is a condition of certification and essential for the efficient running of these lamps, otherwise contamination will deposit into the inside of the lens, reducing illumination levels. Suitable air-line filters can be supplied by the Company.

Another mandatory requirement is the use of anti-static hose.

The 24 volt 250 watt tungsten halogen bulb is available in two types offering a choice of 6,000 lumens for 2,000 hours or 9,000 lumens for 200 hours. All items of spare parts including bulbs and alternative reflectors are readily available from stock.

Turbolite lamps are run in, tested and set to the necessary output prior to shipping. The lamps are simple and easy to maintain and supplied with full maintenance instructions and spare parts diagrams and lists. In-house training on maintenance, setting and operation of air lamps is available.

Turbolite High-Power Air Powered Safety Lamps				
<i>Technical Specification</i>				
Product reference	A-TL44	A-TL44L	A-TL45	A-TL45L
Product description	Safety 360° light, compressed air powered		Safety flood light, compressed air powered	
Code	Ex s II T4 MSHA 10C-35-4			
Apparatus standard	SFA 3009:1972			
Type of protection	"s" special protection			
Area of classification	Zones 1 and 2, gas groups IIA, IIB and IIC			
Temp. classification	T4			
Ambient temperature	-4°F to +104°F			
Certification	BASEEFA Certificate No. Ex 78209X* MSHA			
Enclosure	Nickel plated brass	Aluminium Non Sparking	Nickel plated brass	Aluminium Non Sparking
Lens	Ball glass/plastic dome		Toughened glass (½")	
Beam type	All-around 360° illumination		Flood (as standard) or spot to order	
Light source:	Pt. no.	A-129 (as standard)/A-159 (alternative)		
	Type	Tungsten halogen filament bulb		
	Volts	24v		
	Watts	250w		
	Output	6000 lm/9000 lm		
	Life	2000 hrs/200 hrs		
Power source:	Type	Compressed air driven turbo-alternator		
	Air pressure	58-116 psi		
	Consumption	18-20 cubic ft/min		
Ingress protection	Once pressurised, may be used underwater			
Weight	17lb	12lb	27lb	15lb
*Special certification conditions	A clean dry air supply must be used. Supply hose must be anti-static.			

Note: All information has been gathered under laboratory conditions, the user must regard the values given as approximate. The Company reserves the right to alter product specifications without prior notice.

SAFETY LAMP OF HOUSTON, INC.

1816 Rotary Drive, Humble, Texas 77338. U.S.A.

Telephone: +1 281 964 1019 Facsimile: +1 281 964 1040

Email: safetylampofhouston@prodigy.net Website: www.safetylampofhouston.com

MMD/N/12.03/2K

